


Rotary dimmer with bluetooth

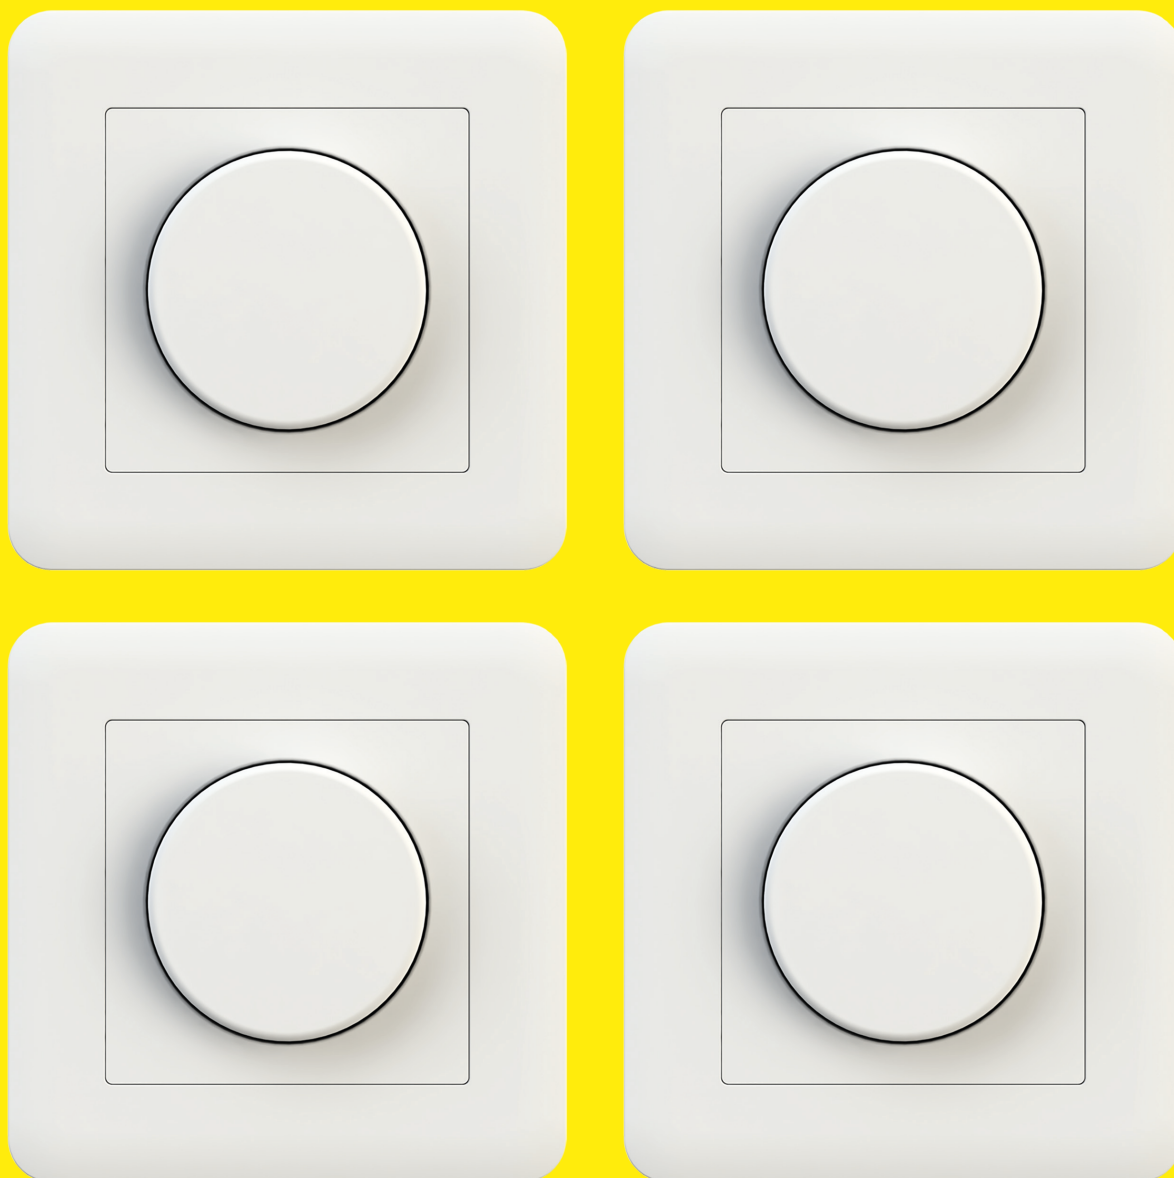

V-40V0220-501


VD220WCM

VADSBO 

Rotary dimmer with Bluetooth VD220WCM

Technical specification

| | |
|-----------------------------|--|
| Designation | VD220WCM |
| Part number | V-40V0220-501 |
| Power | 0-200VA |
| Input voltage | 220-240V |
| Standby Power | 0.2W |
| Max | 0,87A |
| Frequency | 50/60Hz |
| Dimming control | Can be controlled using one or more toggle switches, knobs and/or via Bluetooth |
| Softstart | Yes |
| Dimming level memory | Remembers the last set brightness level, even after a power failure (adjustable) |
| Protection agains over heat | Yes, automatic reset after correction of errors |
| Short circuit protection | No |
| Mount | Mounting in in-wall box |
| Working humidity | 0...80%, non conductive |
| Working temperature | -20°C +40°C |
| Dimensions | Ø52×22mm |
| Weight | 110 gram |
| Cable area | 1.0-2.5mm ² (AWG 12-22) |
| Housing material | Polyamide plastic |
| For dimming of | 230V LED-lamps, electronic transformers, LED operating device, bulb 230V halogen lamps. Do not forget to take the reactive power into consideration when calculating the load. |
| Dimming range | 1%-100% |
| Isolation class | IP20 |
| Casing class | II |
| Approvals | CE |
| Standard | EN60669 |
| Colour 1 | 9010(RAL) Pure white |
| Colour 2 | 9003(RAL) Signal white |

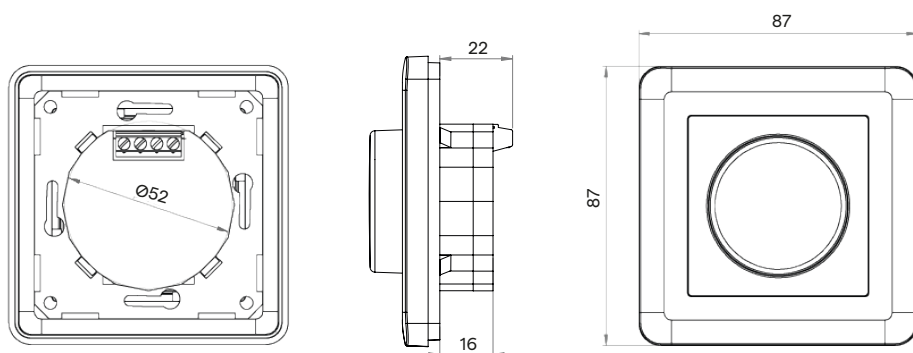

Visiting-/postal address:
Hilma Anderssons gata 15
421 31 Västra Frölunda

Phone/fax:
Tel. +46 (0)31-23 56 00
Fax. +46 (0)31-22 60 10

Email:
info@vadsbo.net
order@vadsbo.net

Webbsite/Facebook:
www.vadsbo.net
facebook.com/Vadsbo